

SMBW 4000 Series™ Filters

Sheet Molded Fiberglass Tank with Backwash Valves



SMBW 4000 Series Filter

Sheet molded fiberglass tank, 2 in. threaded female connections with Noryl® rotary backwash valve.

Featured Highlights


- Maximum Operating Pressure 50 psi
- Corrosion-resistant 20 in. diameter fiberglass filter tank for strength and durability
- Unique Spiro-Mite grid design provides high efficiency filtration and longer filter cycles
- Exclusive clamp ring design is proven to be safe, strong and reliable. It allows for quick and easy access to internal components
- 2 in. plumbing connections provide maximum flow

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			D.E. Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
SMBW 4000 FILTERS WITH BACKWASH VALVE									
011555	SMBW 4048	47	94	45,120	56,400	67,680	4.8	1	89
147411	SMBW 4060	58	116	55,680	69,600	83,520	6.0	1	110

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

Dimensions and Performance

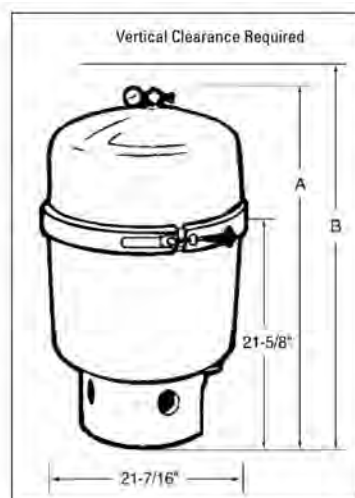

DIMENSION TABLE

MODEL	A DIM.	B DIM.
SMBW 4048	42-7/16 in.	52 in.
SMBW 4060	48-7/16 in.	58 in.

See page 361 for replacement parts.